


LamiPro Lamination Film

(Page 1)



Key Features

- Polypropylene based lamination films for commercial applications
- Low melt co-polymer ensures excellent bond strength when used with high speed lamination machines
- Ideal for one-side lamination jobs - Posters, Carton boxes, Leaflets
- Offer post lamination process for UV spot

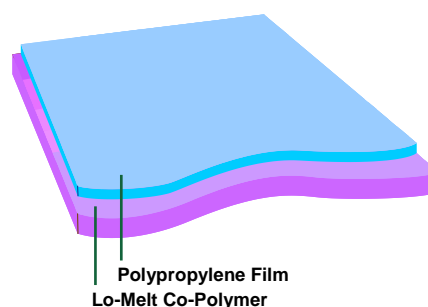

Physical Characteristics

Properties	Unit	Test Method	Products							
Thickness	Mil		0.9	1.0	1.0	1.0	1.1	1.1	1.2	1.2
	Micron		22	23	24	25	27	27	30	30
GSM	gm/m ²	Polyplex	20.0	21.0	22.0	23.0	25.0	24.0	27	27
Yield	m ² /Kg	Polyplex	50.0	47.7	45.5	43.5	40.0	41.7	37.1	37.1
Lamination Temperature		Polyplex	100° ~ 120°C (212° ~ 230°F)							
Corona Treatment	Dyne	ASTM D-2578								
Coating Side			42 ~ 46							
Substrate Side			38 ~ 42							
Surface Finish			Gloss	Matte	Gloss	Matte	Gloss	Matte	Gloss	Matte

Standard Roll Sizes

Core Size		152mm (6")	77mm (3")	26, 58mm (1, 2.25")
Width	mm inch	1850 - 1930 74 - 76	305 - 1100 12 - 44	305 - 1040 12 - 41
Length		As per Customer request (Custom Made)		

Note: The information given above is believed to be true & accurate and is not intended to violate any statutory condition or right of a third party. Polyplex makes no warranty, express or implied, as to the fitness of the products for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification.